


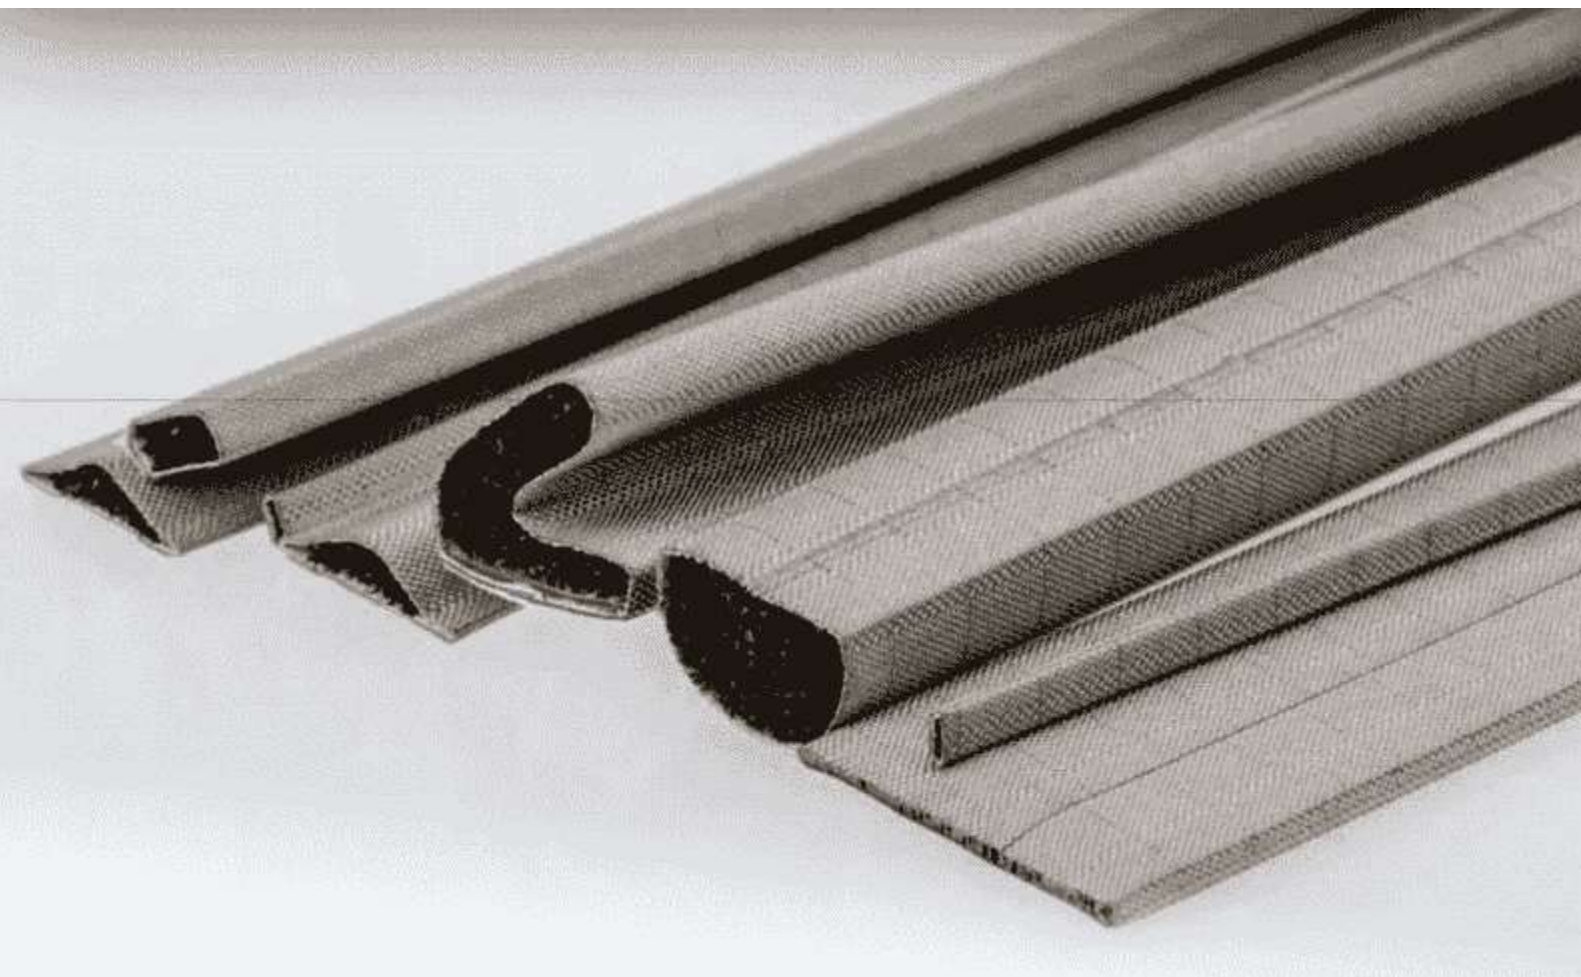

Brief Introduction to Conductive Fabric Over Foam (FOF)

GBA's conductive FOF gaskets provide strong EMI shielding. They are available with either conductive or non-conductive pressure-sensitive adhesive (PSA). These gaskets come in various shapes, such as rectangular, D-shape, C-shape, P-shape, T-shape, knife-shape, bell-shape, and more. They can also be customized through die-cutting, punching, or slotting.

The FOF liners are chemical-free, RoHS compliant, and contain no substances listed under REACH regulations.

PRODUCT FEATURES

Good conductivity and good shielding performance. Low compression.

Good wear resistance and reliability.

Soft, high compression ratio.

Good cost performance.

Simple and diverse installation methods.

Products comply with ROHS, Reach, UL94-V0 and other standards.

Fabric Over Foam (FOF) is made by wrapping polyurethane foam electrically conductive fabric. This combination offers excellent electrical conductivity, wear resistance, corrosion resistance, and good flexibility due to the foam.

Applications:


- Grounding electronic equipment
- Preventing electrostatic discharge (ESD)
- Providing electrical connections between components in electronic devices.

FABRIC OVER FOAM GASKET

Specifications Table Fabric-over-Foam

Item	Ni/Cu Polyester Taffeta	Ni/Cu Polyester Ripstop	Ni/Cu Polyester Mesh	Ni/Cu Polyester Nonwoven	Graphite Film	Nickel Plated PI	Tin Plated PI	Anti-Oxidant Al Foil	Test Method
Color	Grey/Black		Grey	Grey	Golden	Silver		Silver	Visual
Substrate	Fabric		Fabric Mesh	Non-Woven	Graphite Film	PI Film		PI Film	NA
Surface Resistivity (Ω/sq)	<0.07		<0.07	<0.07	NA	<0.02		<0.05	ASTMF390
Shielding Effectiveness (dB)	70		40	80	NA	90		80	MIL-G-83528C
Flammability	HB-V0		HB	HB	V0	V0		V0	UL-94
Operating Temperature ($^{\circ}\text{C}$)	-40~+120		-40~+120	-40~+120	-40~+200	-40~+250		-40~+150	Thermometer
Tensile Strength (lb/in)	70~80		40~50	80~100	50~60	50~60		80~100	ASTM5035
Air Flow ($\text{ft}^3/\text{min}/\text{ft}^2$)	60		NA	500	500	650		650	—
Advantages	Flame Retardant, High Shear Resistant		Low Cost	Flame Retardant High Shear Resistant	Heat Dissipation	High Temperature, Solderable		High Temperature Strong Structure	—
Suggested Application	I/O or Complex Shape Profiles		I/O	I/O or Complex Shape Profiles	Special Application	SMD		Special Application	—




Available (

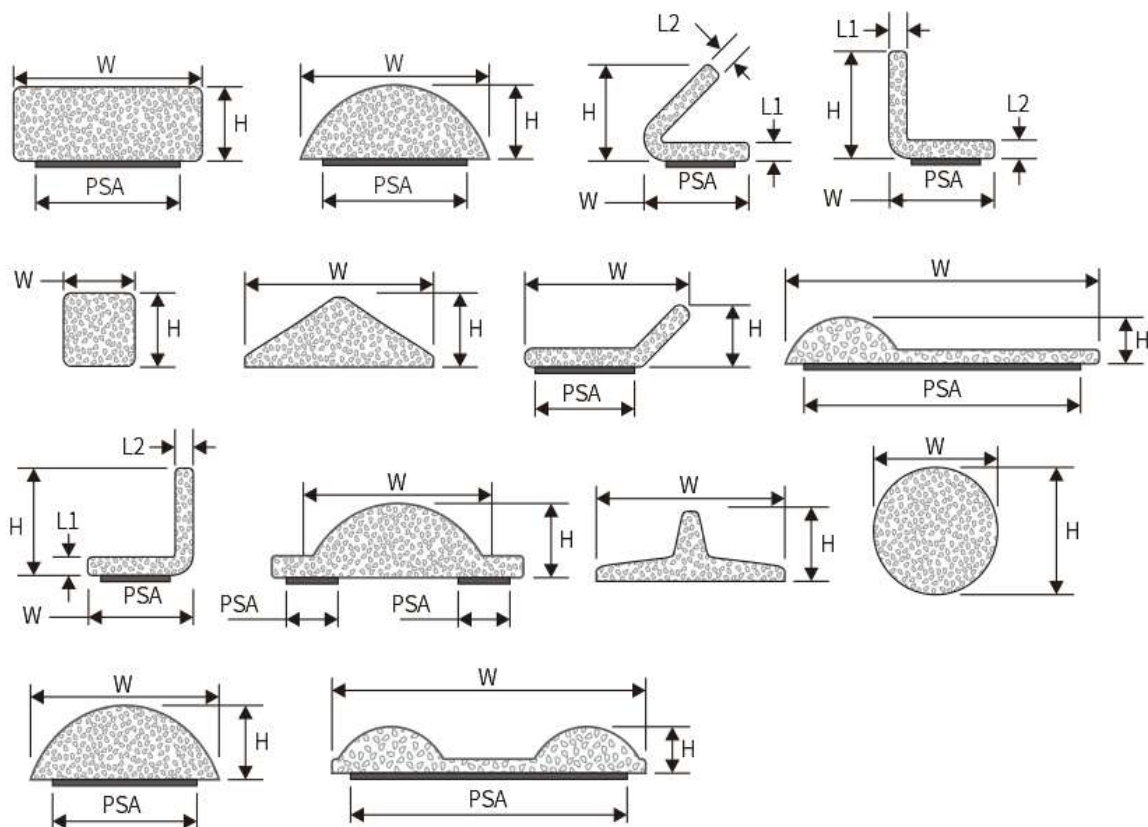

Ordering Code: OEF-Profile#

Example: OEF-R001 for rectangular cross section profile

FABRIC OVER FOAM GASKET






H (mm)	W (mm)	H (inch)	W (inch)	Profile #
0.3	3	0.012	0.118	R001
0.3	4.6	0.012	0.181	R002
0.3	5.5	0.012	0.217	R003
0.3	9.4	0.012	0.37	R004
0.3	10	0.012	0.394	R005
0.4	5	0.016	0.197	R006
0.4	5.1	0.015	0.2	R007
0.4	7	0.015	0.276	R008
0.4	10	0.015	0.394	R009
0.4	21	0.017	0.826	R010
0.5	1.6	0.02	0.063	R011
0.5	2	0.02	0.079	R012
0.5	3	0.02	0.118	R013
0.5	3.8	0.02	0.15	R014
0.5	4	0.02	0.157	R015
0.5	5	0.02	0.196	R016
0.5	6	0.02	0.236	R017
0.5	6.7	0.02	0.264	R018
0.5	7	0.02	0.276	R019
0.5	8	0.02	0.315	R020
0.5	10	0.02	0.394	R021
0.5	15	0.02	0.591	R022
0.5	17	0.02	0.669	R023
0.5	22.5	0.02	0.886	R024
0.5	26	0.02	1.024	R025
0.5	30.9	0.02	1.217	R026
0.5	50	0.02	1.97	R027
0.6	2.6	0.024	0.102	R028
0.6	6	0.024	0.236	R029
0.6	7	0.024	0.276	R030
0.6	8	0.024	0.315	R031
0.6	9	0.024	0.354	R032
0.6	9.3	0.024	0.366	R033
0.6	14	0.022	0.551	R034
0.7	7	0.028	0.276	R035
0.7	8	0.028	0.315	R036
0.7	10	0.028	0.394	R037
0.8	6	0.031	0.236	R038
0.8	8	0.031	0.315	R039
0.8	22.9	0.03	0.9	R040
0.9	1.8	0.035	0.071	R041
0.9	9	0.035	0.354	R042
0.9	12	0.035	0.472	R043
1	2	0.039	0.079	R044
1	2.5	0.039	0.098	R045

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
1	3	0.04	0.12	R046
1	4	0.04	0.157	R047
1	4.5	0.039	0.177	R048
1	5	0.039	0.197	R049
1	5.1	0.039	0.201	R050
1	5.5	0.039	0.217	R051
1	5.6	0.039	0.22	R052
1	6	0.04	0.236	R053
1	6.3	0.039	0.246	R054
1	6.5	0.039	0.256	R055
1	6.6	0.039	0.26	R056
1	7	0.04	0.275	R057
1	8	0.039	0.315	R058
1	8.6	0.039	0.339	R059
1	9	0.039	0.354	R060
1	10	0.04	0.395	R061
1	11	0.039	0.433	R062
1	13	0.04	0.51	R063
1	13.3	0.039	0.524	R064
1	13.6	0.039	0.535	R065
1	15	0.039	0.591	R066
1	15.2	0.04	0.6	R067
1	16	0.039	0.63	R068
1	18	0.04	0.709	R069
1	19.1	0.039	0.75	R070
1	19.1	0.04	0.75	R071
1	20	0.039	0.787	R072
1	21.8	0.039	0.86	R073
1	22.8	0.039	0.898	R074
1	22.9	0.04	0.9	R075
1	25.4	0.04	1	R076
1	28.6	0.04	1.126	R077
1	36.3	0.04	1.431	R078
1	41	0.039	1.614	R079
1	41.3	0.039	1.626	R080
1	41.7	0.04	1.64	R081
1	45	0.04	1.77	R082
1	46.7	0.04	1.84	R083
1	50	0.039	1.969	R084
1	83.8	0.04	3.3	R085
1.1	13.4	0.043	0.528	R086
1.2	1.5	0.047	0.059	R087
1.2	1.8	0.047	0.071	R088
1.2	2	0.047	0.079	R089
1.2	4	0.047	0.157	R090

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
1.2	5	0.047	0.197	R091
1.2	22	0.047	0.866	R092
1.3	8	0.049	0.315	R093
1.3	2.3	0.05	0.09	R094
1.3	5.5	0.051	0.217	R095
1.3	5.6	0.05	0.22	R096
1.3	6	0.051	0.236	R097
1.4	2	0.055	0.079	R098
1.4	2.5	0.055	0.098	R099
1.5	1.5	0.059	0.059	R100
1.5	2	0.059	0.079	R101
1.5	2.8	0.059	0.11	R102
1.5	3.2	0.06	0.125	R103
1.5	3.3	0.059	0.13	R104
1.5	4	0.059	0.157	R105
1.5	5	0.059	0.197	R106
1.5	5.1	0.06	0.2	R107
1.5	5.2	0.059	0.205	R108
1.5	5.4	0.059	0.213	R109
1.5	7	0.059	0.276	R110
1.5	7.1	0.06	0.28	R111
1.5	9	0.059	0.354	R112
1.5	10	0.06	0.394	R113
1.5	12.7	0.06	0.5	R114
1.5	14	0.06	0.551	R115
1.5	15	0.06	0.591	R116
1.5	15.4	0.06	0.608	R117
1.5	15.7	0.06	0.62	R118
1.5	16.2	0.059	0.638	R119
1.5	16.5	0.06	0.65	R120
1.5	18	0.059	0.709	R121
1.5	19.1	0.06	0.75	R122
1.5	20	0.059	0.787	R123
1.5	21.6	0.06	0.85	R124
1.5	22	0.06	0.866	R125
1.5	22.9	0.06	0.9	R126
1.5	25.4	0.06	1	R127
1.5	27	0.06	1.063	R128
1.5	30.5	0.059	1.201	R129
1.5	31.4	0.06	1.235	R130
1.5	33.8	0.06	1.33	R131
1.5	34.8	0.06	1.37	R132
1.5	35.6	0.06	1.4	R133
1.5	37	0.06	1.455	R134
1.5	38.7	0.06	1.525	R135

FABRIC OVER FOAM GASKET






H (mm)	W (mm)	H (inch)	W (inch)	Profile #
1.5	40	0.06	1.575	R136
1.5	41	0.06	1.615	R137
1.5	43	0.06	1.693	R138
1.5	44.2	0.06	1.74	R139
1.5	47.7	0.06	1.878	R140
1.5	48.3	0.06	1.9	R141
1.5	58.5	0.06	2.305	R142
1.5	64	0.06	2.52	R143
1.5	78.5	0.06	3.091	R144
1.5	96	0.06	3.78	R145
1.6	1.8	0.063	0.071	R146
1.6	2	0.063	0.079	R147
1.6	4	0.063	0.157	R148
1.6	7.6	0.062	0.3	R149
1.6	10	0.063	0.394	R150
1.6	22.1	0.062	0.87	R151
1.6	50.8	0.062	2	R152
1.7	4	0.067	0.157	R153
1.8	6.4	0.07	0.25	R154
1.8	4	0.071	0.157	R155
1.8	4.1	0.07	0.16	R156
1.8	4.5	0.071	0.177	R157
1.8	5	0.071	0.197	R158
1.8	14	0.07	0.551	R159
1.8	16.5	0.07	0.65	R160
1.8	27	0.07	1.063	R161
1.9	12.1	0.075	0.476	R162
2	1.6	0.079	0.063	R163
2	2.5	0.079	0.098	R164
2	3	0.079	0.118	R165
2	3.5	0.079	0.138	R166
2	3.8	0.079	0.15	R167
2	4.1	0.08	0.16	R168
2	5	0.079	0.197	R169
2	5.1	0.08	0.2	R170
2	6	0.08	0.236	R171
2	7	0.08	0.275	R172
2	7.5	0.079	0.295	R173
2	8	0.08	0.315	R174
2	9	0.079	0.354	R175
2	9.5	0.079	0.374	R176
2	10.2	0.08	0.4	R177
2	11	0.079	0.433	R178
2	12.9	0.079	0.508	R179
2	13.6	0.08	0.535	R180

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
2	15	0.079	0.591	R181
2	15.3	0.079	0.602	R182
2	16	0.079	0.63	R183
2	17.5	0.079	0.689	R184
2	18	0.08	0.71	R185
2	19	0.079	0.748	R186
2	20	0.08	0.787	R187
2	21	0.08	0.827	R188
2	22	0.079	0.866	R189
2	22.9	0.08	0.9	R190
2	25	0.08	0.984	R191
2	28.6	0.08	1.126	R192
2	32	0.08	1.259	R193
2	34.2	0.08	1.345	R194
2	39.4	0.08	1.55	R195
2	41	0.08	1.615	R196
2	41.3	0.079	1.626	R197
2	44.1	0.08	1.736	R198
2	46.8	0.08	1.842	R199
2	60	0.079	2.362	R200
2	135.6	0.08	5.34	R201
2.1	6.8	0.083	0.268	R202
2.1	10	0.083	0.394	R203
2.2	1.8	0.087	0.071	R204
2.2	2.5	0.087	0.098	R205
2.2	3	0.087	0.116	R206
2.2	4.5	0.087	0.177	R207
2.2	5	0.087	0.197	R208
2.3	3.9	0.091	0.154	R209
2.3	4.5	0.091	0.177	R210
2.3	5.1	0.09	0.2	R211
2.3	13.6	0.09	0.535	R212
2.3	16.8	0.091	0.661	R213
2.3	19.1	0.091	0.75	R214
2.3	21.8	0.091	0.86	R215
2.3	26.9	0.09	1.06	R216
2.3	34.8	0.09	1.37	R217
2.3	42	0.09	1.655	R218
2.3	43.2	0.09	1.7	R219
2.4	2	0.094	0.079	R220
2.4	3	0.094	0.118	R221
2.4	23.6	0.094	0.929	R222
2.5	1.8	0.098	0.071	R223
2.5	3	0.098	0.118	R224
2.5	5	0.098	0.197	R225

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
2.5	6	0.098	0.236	R226
2.5	6.7	0.098	0.264	R227
2.5	6.8	0.098	0.268	R228
2.5	7	0.098	0.276	R229
2.5	9	0.1	0.354	R230
2.5	9.5	0.098	0.374	R231
2.5	12	0.098	0.472	R232
2.5	12.7	0.1	0.5	R233
2.5	22	0.098	0.866	R234
2.5	33.8	0.1	1.33	R235
2.5	38.1	0.1	1.5	R236
2.5	41.3	0.1	1.625	R237
2.7	7	0.106	0.276	R238
2.8	5	0.11	0.197	R239
2.8	6.1	0.11	0.24	R240
3	2	0.118	0.079	R241
3	3.2	0.118	0.125	R242
3	3.5	0.118	0.138	R243
3	3.9	0.12	0.155	R244
3	4	0.118	0.157	R245
3	4.5	0.118	0.177	R246
3	5	0.118	0.197	R247
3	5.1	0.118	0.201	R248
3	7	0.118	0.276	R249
3	8	0.118	0.315	R250
3	9	0.12	0.355	R251
3	9.2	0.118	0.362	R252
3	14	0.118	0.551	R253
3	15	0.118	0.591	R254
3	17	0.118	0.669	R255
3	19.1	0.12	0.75	R256
3	20	0.118	0.787	R257
3	24.2	0.118	0.953	R258
3	25.4	0.118	1	R259
3	32.4	0.118	1.276	R260
3	39.4	0.12	1.551	R261
43	40.9	0.118	1.61	R262
3	43	0.118	1.693	R263
3	43.6	0.118	1.717	R264
3.2	6	0.126	0.236	R265
3.2	6.4	0.125	0.25	R266
3.2	9.5	0.126	0.374	R267
3.2	12.7	0.125	0.5	R268
3.2	15	0.126	0.591	R269
3.2	15.2	0.125	0.6	R270

FABRIC OVER FOAM GASKET






H (mm)	W (mm)	H (inch)	W (inch)	Profile #
3.2	17.5	0.126	0.689	R271
3.2	17.8	0.125	0.7	R272
3.2	18.3	0.125	0.72	R273
3.2	19	0.126	0.748	R274
3.2	20.2	0.126	0.795	R275
3.2	25.4	0.125	1	R276
3.2	28.6	0.125	1.125	R277
3.2	31.8	0.125	1.25	R278
3.2	35.6	0.125	1.4	R279
3.2	41	0.125	1.615	R280
3.2	41.3	0.125	1.625	R281
3.2	47	0.125	1.85	R282
3.2	50.8	0.125	2	R283
3.3	9.7	0.13	0.38	R284
3.4	6	0.134	0.236	R285
3.4	19.1	0.134	0.75	R286
3.4	21.8	0.134	0.86	R287
3.5	3	0.138	0.118	R288
3.5	3.5	0.138	0.138	R289
3.5	4	0.138	0.157	R290
3.5	5	0.138	0.197	R291
3.5	7	0.138	0.276	R292
3.5	8.9	0.138	0.35	R293
3.5	13	0.138	0.512	R294
3.5	16	0.138	0.63	R295
3.6	13	0.14	0.512	R296
3.7	21	0.146	0.827	R297
3.8	2.5	0.15	0.1	R298
3.8	2.8	0.15	0.11	R299
3.8	12.7	0.15	0.5	R300
4	3.5	0.157	0.138	R301
4	4.5	0.157	0.177	R302
4	5	0.157	0.197	R303
4	5.6	0.157	0.22	R304
4	6	0.158	0.236	R305
4	6.5	0.157	0.256	R306
4	8	0.157	0.315	R307
4	9	0.157	0.354	R308
4	9.5	0.157	0.374	R309
4	10	0.157	0.394	R310
4	15	0.157	0.591	R311
4	16	0.156	0.63	R312
4	16.5	0.156	0.65	R313
4	18	0.156	0.709	R314
4.1	5.1	0.16	0.2	R315

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
4.1	6	0.161	0.236	R316
4.1	7.1	0.16	0.28	R317
4.1	15	0.16	0.59	R318
4.1	20.1	0.16	0.79	R319
4.1	22.4	0.16	0.88	R320
4.1	25	0.16	0.985	R321
4.1	34.9	0.16	1.375	R322
4.1	43.2	0.16	1.7	R323
4.4	11.4	0.173	0.449	R324
4.5	4	0.177	0.157	R325
4.5	5	0.177	0.197	R326
4.5	6	0.177	0.236	R327
4.5	6.5	0.177	0.256	R328
4.5	7	0.177	0.276	R329
4.5	9	0.177	0.354	R330
4.6	41.3	0.18	1.625	R331
4.6	50.8	0.18	2	R332
4.8	41.3	0.19	1.625	R333
5	3.3	0.195	0.13	R334
5	4	0.197	0.157	R335
5	5.5	0.197	0.217	R336
5	6	0.197	0.236	R337
5	8	0.196	0.315	R338
5	9	0.197	0.354	R339
5	12	0.197	0.472	R340
5	13	0.197	0.512	R341
5	14.5	0.197	0.571	R342
5	15	0.197	0.591	R343
5	18	0.197	0.709	R344
5	19.1	0.197	0.75	R345
5	21.8	0.197	0.86	R346
5.1	6.4	0.201	0.252	R347
5.1	99.1	0.2	3.9	R348
5.2	6.8	0.205	0.268	R349
5.2	7.2	0.205	0.283	R350
5.5	4	0.217	0.157	R351
5.5	7	0.217	0.276	R352
5.5	12.7	0.216	0.5	R353
5.5	18	0.217	0.709	R354
5.6	7.9	0.22	0.311	R355
5.7	4.5	0.224	0.177	R356
5.7	5.5	0.225	0.218	R357
6	2.5	0.236	0.098	R358
6	3	0.236	0.118	R359
6	4	0.236	0.157	R360

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
6	5	0.236	0.197	R361
6	6.5	0.236	0.256	R362
6	8	0.236	0.315	R363
6	9	0.236	0.354	R364
6	10	0.236	0.394	R365
6	12	0.236	0.472	R366
6	15	0.236	0.591	R367
6	25.4	0.236	1	R368
6.2	6.3	0.244	0.248	R369
6.2	22	0.244	0.866	R370
6.2	28.5	0.244	1.122	R371
6.4	6.4	0.252	0.252	R372
6.4	12.7	0.25	0.5	R373
6.4	15.2	0.25	0.6	R374
6.4	25.4	0.25	1	R375
6.4	41.3	0.252	1.626	R376
6.5	6	0.256	0.236	R377
6.5	10	0.256	0.394	R378
6.5	14.5	0.256	0.571	R379
6.5	22	0.256	0.866	R380
6.5	25.4	0.256	1	R381
6.5	28.5	0.256	1.122	R382
7	2.5	0.276	0.098	R383
7	4	0.276	0.157	R384
7	6	0.276	0.236	R385
7	10	0.275	0.394	R386
7	13	0.275	0.511	R387
7.2	6.3	0.283	0.248	R388
7.2	9	0.283	0.354	R389
7.2	30	0.283	1.18	R390
7.5	15	0.295	0.591	R391
7.5	38.1	0.295	1.5	R392
8	4	0.315	0.157	R393
8	6	0.315	0.236	R394
8	10	0.315	0.394	R395
8	12	0.315	0.472	R396
8	15	0.315	0.591	R397
8.2	4.5	0.323	0.177	R398
9	10	0.354	0.394	R399
9.5	6.4	0.375	0.25	R400
9.5	19.1	0.375	0.75	R401
9.5	20	0.374	0.787	R402
9.5	25.4	0.375	1	R403
10	8	0.394	0.315	R404
10	12	0.394	0.472	R405

FABRIC OVER FOAM GASKET




H (mm)	W (mm)	H (inch)	W (inch)	Profile #
10	20	0.394	0.787	R406
10.5	10	0.413	0.394	R407
10.5	13	0.413	0.512	R408
11	5	0.433	0.197	R409
11	6	0.433	0.236	R410
11	10	0.433	0.394	R411
11	10.5	0.433	0.413	R412
11.5	12	0.452	0.472	R413
12	4.5	0.472	0.177	R414
12	5	0.472	0.197	R415
12	8	0.472	0.315	R416
12	10	0.472	0.394	R417
12	12	0.472	0.472	R418
12	15	0.472	0.591	R419
12.7	25	0.5	0.984	R420
14	8	0.551	0.315	R421
14	10	0.551	0.394	R422
15	10	0.591	0.394	R423
15.2	25.4	0.6	1	R424
15.9	25.4	0.626	1	R425
17	15	0.67	0.591	R426
17.8	12.7	0.7	0.5	R427
18	10	0.709	0.394	R428
18	24	0.709	0.945	R429
20	7	0.787	0.276	R430
20	14.7	0.787	0.58	R431
20	15	0.787	0.591	R432
22	15	0.866	0.591	R433
25	15	0.984	0.591	R434
25	20	0.984	0.787	R435
30	10	1.181	0.394	R436


H (mm)	W (mm)	H (inch)	W (inch)	Profile #
1	3.8	0.04	0.15	D001
1.2	10	0.047	0.394	D002
1.3	3.6	0.05	0.14	D003
1.3	6.4	0.05	0.25	D004
1.5	2.5	0.06	0.098	D005
1.5	3	0.059	0.118	D006
1.5	3.8	0.06	0.15	D007
1.5	4.5	0.059	0.177	D008
1.5	6	0.059	0.236	D009
1.5	6.4	0.06	0.25	D010
1.5	8	0.059	0.315	D011
1.5	17	0.059	0.669	D012
1.8	3.8	0.071	0.15	D013
1.8	4.3	0.071	0.169	D014
1.8	4.6	0.07	0.18	D015
1.8	7.5	0.071	0.295	D016
1.8	10	0.07	0.394	D017
1.8	12.7	0.071	0.5	D018
1.9	3.8	0.075	0.15	D019
2	2	0.08	0.08	D020
2	3.6	0.079	0.142	D021
2	4	0.079	0.157	D022
2	9.4	0.079	0.37	D023
2	10	0.08	0.394	D024
2	12.7	0.079	0.5	D025
2	17	0.079	0.669	D026
2.1	8	0.083	0.315	D027
2.2	7.6	0.087	0.299	D028
2.3	2.3	0.091	0.091	D029
2.3	3.8	0.09	0.15	D030
2.3	5.2	0.091	0.205	D031
2.3	6	0.091	0.236	D032
2.3	8	0.091	0.315	D033
2.3	10	0.091	0.394	D034
2.3	17.1	0.091	0.673	D035
2.4	5.1	0.094	0.2	D036
2.4	9.5	0.094	0.374	D037
2.5	4	0.098	0.157	D038
2.5	6.3	0.098	0.248	D039
2.5	6.4	0.098	0.25	D040
2.5	7.6	0.1	0.3	D041
2.5	8	0.098	0.315	D042
2.5	10	0.098	0.394	D043
2.5	14.8	0.098	0.583	D044
2.6	4.5	0.102	0.177	D045

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
2.6	9.4	0.102	0.37	D046
2.7	3.6	0.106	0.142	D047
2.7	4.3	0.106	0.169	D048
2.7	6	0.106	0.236	D049
2.7	10	0.106	0.394	D050
2.7	12.7	0.106	0.5	D051
2.7	17	0.106	0.669	D052
2.8	5.7	0.11	0.224	D053
2.8	7	0.11	0.276	D054
2.8	9.5	0.11	0.374	D055
2.9	2.7	0.114	0.106	D056
3	2.5	0.118	0.098	D057
3	3.8	0.12	0.15	D058
3	6	0.118	0.236	D059
3	6.4	0.12	0.25	D060
3	8.5	0.118	0.335	D061
3	9.1	0.118	0.358	D062
3	10	0.118	0.394	D063
3	12	0.118	0.472	D064
3	12.7	0.118	0.5	D065
3.1	3.8	0.122	0.15	D066
3.1	6.4	0.122	0.252	D067
3.1	9.1	0.122	0.358	D068
3.1	12.7	0.122	0.5	D069
3.2	12.7	0.125	0.5	D070
3.2	2.3	0.125	0.09	D071
3.3	4.8	0.13	0.188	D072
3.3	6	0.13	0.236	D073
3.3	6.5	0.13	0.256	D074
3.3	7.6	0.13	0.299	D075
3.3	8	0.13	0.315	D076
3.3	12.7	0.13	0.5	D077
3.3	17	0.13	0.669	D078
3.5	6	0.138	0.236	D079
3.5	8	0.138	0.315	D080
3.5	9.5	0.138	0.374	D081
3.5	10	0.138	0.394	D082
3.5	12.7	0.138	0.5	D083
3.5	17	0.138	0.669	D084
3.6	6.4	0.14	0.25	D085
3.6	8.6	0.142	0.339	D086
3.8	3.8	0.15	0.15	D087
3.8	6	0.15	0.236	D088
3.8	8	0.15	0.315	D089
3.8	9	0.15	0.354	D090


FABRIC OVER FOAM GASKET




H (mm)	W (mm)	H (inch)	W (inch)	Profile #
3.8	10	0.15	0.394	D091
3.8	17	0.15	0.669	D092
4	3.8	0.157	0.15	D093
4	10.8	0.157	0.425	D094
4	11	0.158	0.433	D095
4	12.7	0.157	0.5	D096
4	20	0.157	0.787	D097
4.1	14.2	0.16	0.56	D098
4.1	6.1	0.16	0.24	D099
4.1	6.4	0.161	0.25	D100
4.1	14.2	0.161	0.559	D101
4.1	18.3	0.161	0.72	D102
4.3	6	0.169	0.236	D103
4.3	6.4	0.17	0.25	D104
4.3	9.7	0.169	0.382	D105
4.3	12.7	0.169	0.5	D106
4.3	9.7	0.17	0.38	D107
4.5	8	0.177	0.315	D108
4.5	10	0.177	0.394	D109
4.6	10	0.181	0.394	D110
4.6	10.2	0.18	0.4	D111
4.8	7.6	0.189	0.299	D112
5	9.5	0.197	0.374	D113
5	10	0.197	0.394	D114
5	17.2	0.197	0.677	D115
5.1	6.4	0.2	0.25	D116
5.1	10	0.2	0.394	D117
5.1	12.2	0.2	0.48	D118
5.3	17.2	0.207	0.675	D119
5.3	17.2	0.207	0.677	D120
5.5	10.4	0.217	0.409	D121
5.8	12.7	0.228	0.5	D122
6	17	0.236	0.669	D123
6.3	7.4	0.248	0.291	D124
6.4	9.5	0.252	0.374	D125
7.6	6.9	0.299	0.272	D126
7.6	12.7	0.299	0.5	D127
8.5	10	0.335	0.394	D128
9.5	12.7	0.375	0.5	D129
12.7	12.7	0.5	0.5	D130




H (mm)	W (mm)	H (inch)	W (inch)	Profile #
3	3	0.118	0.118	S001
4	4	0.157	0.157	S002
5	5	0.195	0.195	S003
5.1	5.1	0.201	0.201	S004
6	6	0.236	0.236	S005
6.4	6.4	0.25	0.25	S006
7	7	0.276	0.276	S007
9.5	9.5	0.375	0.375	S008
10	10	0.395	0.395	S009
17	17	0.67	0.67	S010
19.1	19.1	0.75	0.75	S011
20	20	0.787	0.787	S012




H (mm)	W (mm)	H (inch)	W (inch)	Profile #
1	9.5	0.039	0.374	TR001
1.6	5	0.063	0.197	TR002
2.3	6.4	0.091	0.25	TR003
2.3	9.2	0.091	0.362	TR004
2.3	12.7	0.091	0.5	TR005
2.4	7.6	0.094	0.299	TR006
2.8	8.1	0.11	0.319	TR007
2.8	15.7	0.11	0.618	TR008
3	8.1	0.118	0.319	TR009
3	13	0.118	0.512	TR010
4	18.3	0.157	0.72	TR011
6	12.4	0.236	0.488	TR012

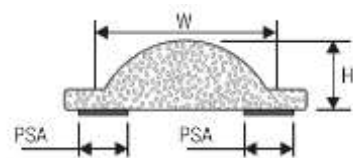

H (mm)	W (mm)	H (inch)	W (inch)	Profile #
1.8	14.3	0.07	0.564	B001
2	17.1	0.08	0.675	B002
2.5	10	0.1	0.394	B003
3	10.1	0.118	0.398	B004
3.1	10.2	0.12	0.402	B005
3.6	12.7	0.14	0.5	B006
5.5	15	0.217	0.591	B007




H (mm)	W (mm)	H (inch)	W (inch)	Profile #
3.9	3.9	0.152	0.235	T001
4.0	4.0	0.157	0.244	T002
4.4	4.4	0.172	0.244	T003
4.9	4.9	0.194	0.325	T004
5.1	5.1	0.201	0.189	T005
6.4	6.4	0.252	0.189	T006

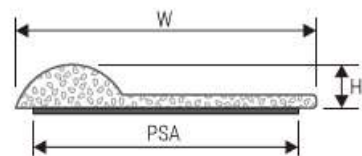


H (mm)	W (mm)	H (inch)	W (inch)	Profile #
3	12.5	0.118	0.492	P001
3	13.2	0.118	0.52	P002
3.3	13.2	0.13	0.52	P003
3.7	13.2	0.145	0.52	P004
4.4	16.4	0.173	0.646	P005
7	11	0.276	0.433	P006
9.5	22.5	0.374	0.887	P007
11.4	16	0.449	0.63	P008


FABRIC OVER FOAM GASKET




H (mm)	W (mm)	H (inch)	W (inch)	Profile #
3.5	5	0.138	0.197	OV001
6.4	12.7	0.25	0.5	OV002

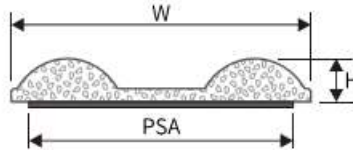


H (mm)	W (mm)	H (inch)	W (inch)	Profile #
2.8	9.7	0.11	0.382	DD001




H (mm)	W (mm)	H (inch)	W (inch)	Profile #
2.5	2.5	0.1	0.1	O001
3.2	3.2	0.125	0.125	O002




H (mm)	W (mm)	H (inch)	W (inch)	L1 (mm)	L2 (mm)	L1 (inch)	L2 (inch)	Profile #
6.4	7.1	0.252	0.28	3.2	1.5	0.125	0.06	C001
8	8	0.315	0.315	2	2	0.08	0.08	C002
9.8	10.7	0.385	0.42	2.9	1.5	0.115	0.06	C003
10	10.9	0.394	0.429	3.2	1.5	0.125	0.06	C004
11.8	10.7	0.465	0.42	2.9	1.5	0.115	0.06	C005
17.1	14.7	0.673	0.579	3.9	3.6	0.155	0.14	C006
17.1	15	0.675	0.59	4.2	4	0.165	0.156	C007
23.9	14	0.941	0.551	3.9	4.3	0.155	0.17	C008



H (mm)	W (mm)	H (inch)	W (inch)	Profile #
1.5	14.3	0.059	0.563	K001
1.7	12.3	0.067	0.484	K002
1.8	14.2	0.071	0.559	K003
2.0	7.6	0.079	0.299	K004
2.2	4.6	0.087	0.181	K005
2.7	8.0	0.106	0.315	K006
2.7	11.3	0.106	0.445	K007
2.7	17.5	0.106	0.689	K008
2.8	11.4	0.110	0.450	K009
3.0	16.5	0.118	0.650	K010
3.1	8.0	0.122	0.315	K011
3.3	10.0	0.130	0.394	K012
4.6	14.0	0.181	0.551	K013
5.5	10.0	0.217	0.394	K014
6.4	19.1	0.252	0.752	K015
7.9	18.0	0.312	0.707	K016
8.9	19.1	0.350	0.750	K017



H (mm)	W (mm)	H (inch)	W (inch)	L1 (mm)	L2 (mm)	L1 (inch)	L2 (inch)	Profile #
5.5	9	0.216	0.354	3.5	3	0.138	0.118	L001
15	14	0.591	0.551	2.5	3.2	0.098	0.126	L002



H (mm)	W (mm)	H (inch)	W (inch)	L1 (mm)	L2 (mm)	L1 (inch)	L2 (inch)	Profile #
3.3	3.3	0.13	0.13	1.5	1.7	0.06	0.065	J001
5.3	3.3	0.209	0.13	1.6	1.8	0.063	0.071	J002
10.2	7.6	0.4	0.3	4.4	3.6	0.175	0.14	J003